


OSAIC


WAVY COLLECTIONS

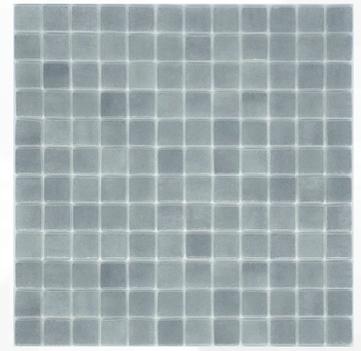

SA 118

MOSAIC SIZE:25MM
JOINT SIZE:1.5MM
SHEET SIZE:31.6MM



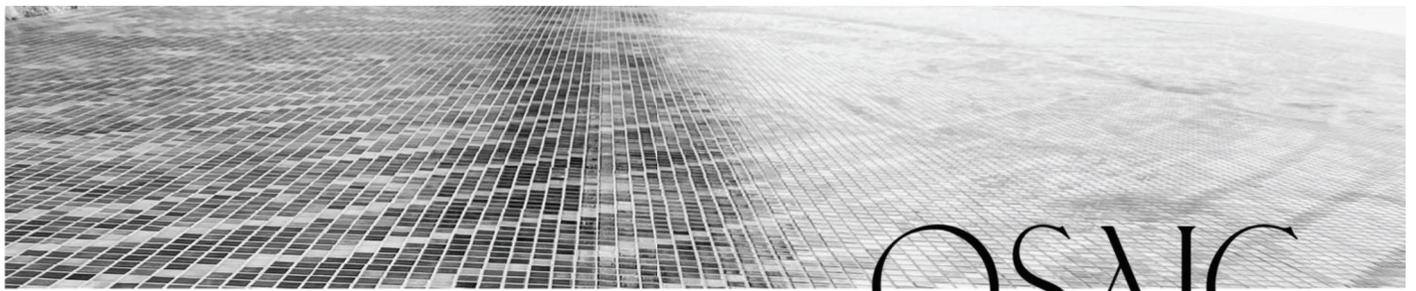

OSAIC

WAVY Collection

Piece 1" x 1" • Piece 2.5x2.5cm. Sheet 12 1/2" x 12 1/2" • Panel 31,6 x 31,6 cm.

SUITABILITY AREA PRODUCT & COMPOSITION GUIDE

Wall	Floor	Wet areas	Pools	Material
Int / Ext	Residential	Yes	Yes	Glass



PACKING SOLID COLORS (MESH)

SIZE / MESH	WEIGHT / BOX	M ² / BOX	PIECES / BOX	M ² / PALLET	WEIGHT / PALLET
31,6 x 31,6 cm. 12 1/2" x 12 1/2"	17,33 kg	2 m ²	20	126 m ²	1.200 kg

TECHNICAL CHARACTERISTICS

Test UNE-EN-ISO 10545-3 Water Absorption	Test UNE-EN-ISO-101-92=101 Surface hardness. Mohs	Test UNE-EN-ISO 10545-9 Resistance to thermal shocks	Test UNE-EN-ISO 10545-12 Frost resistance	Test UNE-EN-ISO 10545-13:1998 Resistance to chemical attack			
				Domestic products	Pool water additives	Low acid and alkalins	High acid and alkalins
None	4	Resistant	Resistant	GA	GA	GLA	GHA
Test UNE-EN-ISO 10545-14 Resistance to staining	Test UNE-EN-ISO 10545-11=1997 Cracking	DIN 51094 Colour Stability on exposure to light and UV rays	DCOF Wet Dynamic Coefficient of Friction ANSI A 137.1 Standard		DIN 51130:2004 SLIP Resistance wearing shoes	DIN 51097 SLIP Resistance in bare feet	Test UNE-ENV 12633:2003 (CTE) Anti skid coefficient, suitable for outdoor use and swimming pools.
Class 5	Resistant	Resistant	≥0,60*		R11*	ClassC	Class 3

WWW.BYOSAIC.COM

