

WALL • Calacatta Imperiale Polished 60x120 Rect.
FLOOR • Calacatta Imperiale Polished 120x120 Rect.

Calacatta Imperiale

MARBLE COLLECTION

MARBLE COLLECTION



WALL- Calacata Imperiale Silk 59,5x119,2 Rect.
FLOOR- Calacata Imperiale Matt 59,5x59,5 Rect.

Calacatta Imperiale

Porcelain Porcelánico



	120x120		
	90x90		
60x120	60x60		

AVAILABLE FORMATS / FORMATOS DISPONIBLES




PIECES NAME NOMBRE DE LA PIEZA		SIZES FORMATOS	PRICE GROUP GRUPO DE PRECIOS
Calacatta Imperiale Polished	⊕	120x120 cm 48x48"	B18
		60x120 cm 24x48"	B54
Calacatta Imperiale Silk	◐	59,5x119,2 cm 24x48"	B86
Calacatta Imperiale Matt	○	90x90 cm 36x36"	B70
		59,5x59,5 cm 24x24"	B60
Calacatta Imperiale Shiny	⊕	59,5x59,5 cm 24x24"	B60

120x120_10 Design | 60x120_20 Design | 90x90_10 Design | 60x60_10 Design



MARBLE COLLECTION

Calacatta
Imperiale

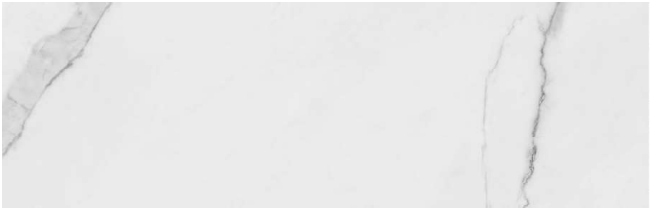

Calacatta
Imperiale Decor



Calacatta Imperiale

White Body Pasta Blanca

31,6x100

AVAILABLE FORMATS / FORMATOS DISPONIBLES



PIECES NAME NOMBRE DE LA PIEZA		SIZES FORMATOS	PRICE GROUP GRUPO DE PRECIOS
Calacatta Imperiale Shiny		31,6x100 cm 12x40"	B94
Calacatta Imperiale Shiny Decor			B95

31,6x100_20 Design

Calacatta Imperiale

Colores
Colours



V1 Variación gráfica ligera
Slight graphical variation

P Porcelánico
Porcelain  Pavimento
Floor tiles  Revestimiento
Wall tiles  Resistencia la helada
Frost resistance

Medida nominal (cm) Nominal size	Espesor - E (mm) Thickness E	Tipología Typology	Deslizamiento Coefficient of friction
120 x 120 Polished	10,7	Bla-GL	-
60 x 120 Polished	10,5	Bla-GL	-
59,5 x 119,2 Matt +	9,2	Bla-GL	C1 / R9
90 x 90 Matt	10	Bla-GL	C1 / R9
59,5 x 59,5 Matt	8,5	Bla-GL	C1 / R9
59,5 x 59,5 Shiny	8,5	Bib-GL	-
31,6 x 100 Shiny	9,7	BIII-GL	-
31,6 x 100 Shiny Decor	10,4	BIII-GL	-

CARACTERÍSTICAS TÉCNICAS TECHNICAL FEATURES

	ISO 13006 UNE-EN 14411	Bla    	Bib  	BIIa  	BIII 
Longitud y anchura Length and width	EN ISO 10545-2	± 0,6 % ± 2,0 mm	± 0,6 % ± 2,0 mm	± 0,6 % ± 2,0 mm	± 0,5 % ± 2,0 mm
Espesor Thickness	EN ISO 10545-2	± 5 % ± 0,5 mm	± 5 % ± 0,5 mm	± 5 % ± 0,5 mm	± 10 % ± 0,5 mm
Rectitud de lados Straightness of sides	EN ISO 10545-2	± 0,5 % ± 1,5 mm	± 0,5 % ± 1,5 mm	± 0,5 % ± 1,5 mm	± 0,5 %
Ortogonalidad Rectangularity	EN ISO 10545-2	± 0,5 % ± 2,0 mm	± 0,5 % ± 2,0 mm	± 0,5 % ± 2,0 mm	± 0,3 % ± 1,5 mm
Planitud de superficie Surface flatness	EN ISO 10545-2	± 0,5 % ± 2,0 mm	± 0,5 % ± 2,0 mm	± 0,5 % ± 2,0 mm	+ 0,5 % ; - 0,3 % + 2 mm ; - 1,5 mm
Absorción de agua Water absorption	EN ISO 10545-3	E ≤ 0,5 % Max. Individual 0,6%	0,5 % ≤ E ≤ 3 %	3 % < E < 6 % Max. Individual 0,6%	E > 10 %
Fuerza de rotura (N)* Breaking strength *	EN ISO 10545-4	E > 7,5 mm > 1300 N E < 7,5 mm > 700 N	E > 7,5 mm > 1100 N E < 7,5 mm > 700 N	E > 7,5 mm > 1000 N E < 7,5 mm > 600 N	E > 7,5 mm > 600 N E < 7,5 mm > 200 N
Resistencia a la flexión (N/mm²) Modulus of rupture	EN ISO 10545-4	> 35 N/mm² Min. Individual 35 N/mm²	> 35 N/mm² Min. Individual 27 N/mm²	> 22 N/mm² Min. Individual 20 N/mm²	E > 7,5 > 12 N/mm² E < 7,5 > 15 N/mm²
Resistencia a la abrasión profunda (Solo UGL) Surface deep abrasion resistance (Solo UGL)	EN ISO 10545-6	Mín. 175 mm³	Mín. 175 mm³	Mín. 345 mm³	No aplica Not apply
Resistencia a la abrasión superficial (Solo GL) Surface abrasion resistance (Solo GL)	EN ISO 10545-7	Valor declarado Declared value	Valor declarado Declared value	Valor declarado Declared value	No aplica Not apply
Coefficiente de dilatación térmica lineal (1/k) Coefficient of linear thermal expansion	EN ISO 10545-8	Valor declarado Declared value	Valor declarado Declared value	Valor declarado Declared value	Valor declarado Declared value
Resistencia al choque térmico Thermal shock resistance	EN ISO 10545-9	Resiste Resist	Resiste Resist	Resiste Resist	Resiste Resist
Resistencia al cuarteo Crazing resistance	EN ISO 10545-11	Resiste Resist	Resiste Resist	Resiste Resist	Resiste Resist
Resistencia a la helada Frost resistance	EN ISO 10545-12	Resiste Resist	No resiste Not resist	No resiste Not resist	No resiste Not resist
Deslizamiento Coefficient of friction	UNE ENV 41901 DIN 51130 DIN 51097 ANSI A137.1	Valor declarado Declared value	Valor declarado Declared value	Valor declarado Declared value	No aplica Not apply
Resistencia a productos de limpieza y aditivos para piscina Resistance to household chemicals and swimming pool salts	EN ISO 10545-4	Min GB	Min GB	Min GB	Min GB
Resistencia a bajas concentraciones Resistance to low concentrations	EN ISO 10545-13	GLA - ULA / GLB (Pulido) GLA - ULA / GLB (Polished)	GLA	GLA	GLA
Resistencia a altas concentraciones Resistance to high concentrations	EN ISO 10545-13	GLA - UHA / GLB (Pulido) GLA - UHA / GLB (Polished)	GHA	GHA	GHA
Resistencia a las manchas Resistance to stains	EN ISO 10545-14	> 3	> 3	> 3	> 3

Las características indicadas son generales por grupo de absorción, para características concretas de modelo y color solicitar la ficha técnica correspondiente. The characteristics indicated are general for each absorption group, for specific characteristics of the model and color, please request the corresponding technical data sheet.
* E corresponde al espesor indicado en la tabla de la esquina superior derecha. E is the thickness shown in the upper right-hand corner of table.