




SOLID

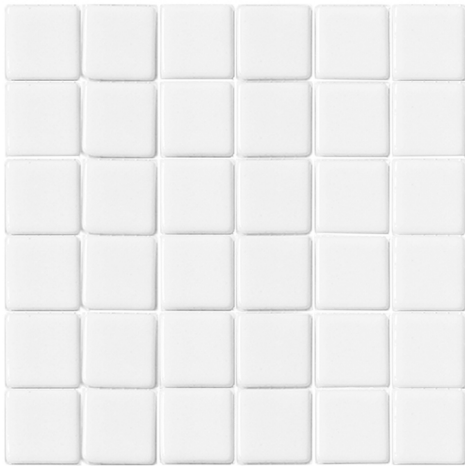

WHITE

TESSERAE: 47X47
 MESH: 290 x 290
 COLOUR: BLUE
 FINISH: SHINY
 SUPPORT: MESH / DOTS



SOLID 4.7

SUITABILITY AREA PRODUCT & COMPOSITION GUIDE

Wall	Floor	Wet areas	Pools	Material
Int / Ext	Residential	Yes	Yes	Glass



PACKING

Sheet	4,7 mm - 0.6mm Thickness	290x290 mm	1,02 kg
Box	12 Sheets	1 m ²	12,48 kg
Pallet Palet	90 Boxes	90 m ²	1.120 kg

TECHNICAL CHARACTERISTICS

Test UNE-EN-ISO 10545-3 Water Absorption	Test UNE-EN-ISO-101-92-101 Surface hardness. Mohs	Test UNE-EN-ISO 10545-9 Resistance to thermal shocks	Test UNE-EN-ISO 10545-12 Frost resistance	Test UNE-EN-ISO 10545-13:1998 Resistance to chemical attack			
				Domestic products	Pool water additives	Low acid and alkalis	High acid and alkalis
None	4	Resistant	Resistant	GA	GA	GLA	GHA
Test UNE-EN-ISO 10545-14 Resistance to staining	Test UNE-EN-ISO 10545-11-1997 Cracking	DIN 51094 Colour Stability on exposure to light and UV rays	DCOF Wet Dynamic Coefficient of Friction ANSI A 137.1 Standard		DIN 51130:2004 SLIP Resistance wearing shoes	DIN 51097 SLIP Resistance in bare feet	Test UNE-ENV 12633:2003 (CTE) Anti skid coefficient, suitable for outdoor use and swimming pools.
Clase 5	Resistant	Resistant					